


ABRAMUD HW /20

SUCTION AND DELIVERY HOSE FOR DRILLING MUDS

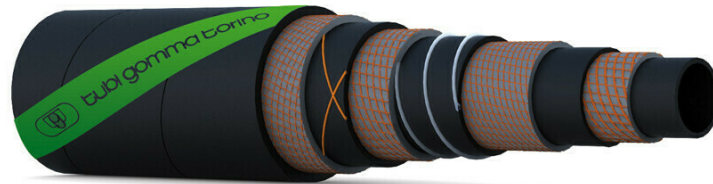

APPLICATION

Suction and delivery hose, for drilling oil rig hose services, for petroleum muds and crude oil

TUBE

Black, smooth, **NBR/PVC** rubber compound

REINFORCEMENT

High strength synthetic plies, with steel wire spirals and crossing copper wires for hose grounding

COVER

Black, smooth cloth impression, **CR** rubber compound, resistant to oil, grease, sea water, ozone and flame retardant

WORKING TEMPERATURE

-40°F +212°F
-40°C +100°C

ID		OD		WEIGHT	WP		BP		BENDING RADIUS	VACUUM	COIL LENGTH
mm	inch	mm	inch	kg/m	bar	psi	bar	psi	mm	bar	m
76	3	96	3 25/32	3.75	20	300	80	1200	350	0.9	60
102	4	123	4 27/32	5.20	20	300	80	1200	480	0.9	60
127	5	150	5 29/32	6.70	20	300	80	1200	850	0.9	60
152	6	180	7 15/16	7.62	20	300	80	1200	1000	0.9	60
203	8	237	9 21/64	20.37	20	300	60	900	1420	0.5	40
254	10	290	11 27/64	25.50	20	300	60	900	1780	0.5	20

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.

BRANDING

