


ABRAMUD-X SW/20

DELIVERY HOSE FOR DRILLING MUDS - HIGH ABRASION RESISTANCE

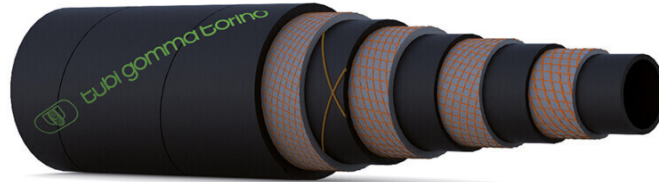

APPLICATION

Delivery hose, for drilling oil rig hose services, for petroleum muds and crude oil with aromatic contents up to 50%

TUBE

Black, smooth, X-NBR rubber compound

REINFORCEMENT

High strength synthetic cord, with crossing copper wires for hose grounding

COVER

Black, smooth cloth impression, CR rubber compound, resistant to oil, grease, sea water, ozone and flame retardant

WORKING TEMPERATURE

-22°F +176°F
-30°C +80°C

ID		OD		WEIGHT	WP		BP		COIL LENGTH
mm	inch	mm	inch	kg/m	bar	psi	bar	psi	m
76	3	96	3 25/32	3.50	20	300	80	1200	60
102	4	124	4 7/8	4.80	20	300	80	1200	60
127	5	153	6 5/32	6.90	20	300	80	1200	60
152	6	178	7	8.20	20	300	80	1200	60

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.

BRANDING

