


AERWATER SW /20 Y

AIR AND WATER DELIVERY HOSE - YELLOW COVER

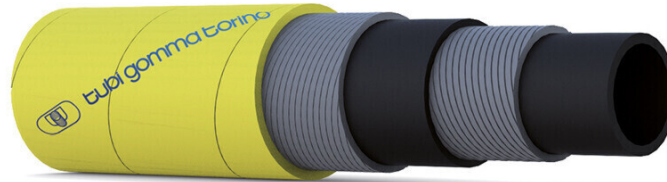

APPLICATION

Yellow air and water delivery hoses, for docks & oil rigs services

TUBE

Black, smooth, **SBR** rubber compound

REINFORCEMENT

High strength synthetic plies

COVER

Yellow, smooth cloth impression, **SBR** rubber compound, oil, grease, sea water and weather resistant

WORKING TEMPERATURE

-22°F +176°F

-30°C +80°C

| ID | | OD | | WEIGHT | WP | | BP | | COIL LENGTH |
|-----|-------|-----|---------|--------|-----|-----|-----|------|-------------|
| mm | inch | mm | inch | kg/m | bar | psi | bar | psi | m |
| 13 | 1/2 | 23 | 29/32 | 0.40 | 20 | 300 | 80 | 1200 | 40/61 |
| 19 | 3/4 | 30 | 1 3/16 | 0.60 | 20 | 300 | 80 | 1200 | 40/61 |
| 25 | 1 | 37 | 1 29/64 | 0.90 | 20 | 300 | 80 | 1200 | 40/61 |
| 32 | 1 1/4 | 44 | 1 47/64 | 1.20 | 20 | 300 | 80 | 1200 | 40/61 |
| 38 | 1 1/2 | 52 | 2 15/32 | 1.65 | 20 | 300 | 80 | 1200 | 40/61 |
| 51 | 2 | 64 | 2 33/64 | 2.10 | 20 | 300 | 80 | 1200 | 40/61 |
| 76 | 3 | 96 | 3 25/32 | 3.18 | 20 | 300 | 80 | 1200 | 40/61 |
| 102 | 4 | 124 | 4 7/8 | 4.63 | 20 | 300 | 80 | 1200 | 40/61 |

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.

BRANDING

