


AQUASPIR SD /5

WATER SUCTION AND DELIVERY HOSE

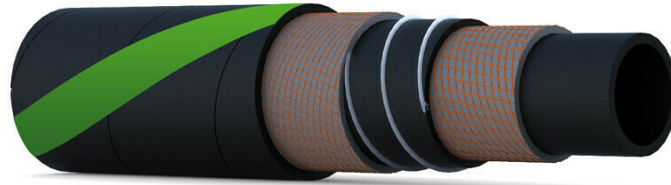

APPLICATION

Suction and delivery hose for water and inert fluids for sprinkler irrigation equipments. Very strong and flexible structure

TUBE

Black, smooth, **SBR** rubber compound

REINFORCEMENT

High strength synthetic plies with steel wire spirals

COVER

Black, smooth, cloth impression **SBR/EPDM** rubber compound, abrasion and weather resistant

WORKING TEMPERATURE

-22°F +176°F
-30°C +80°C

ID		OD		WEIGHT	WP		BP		BENDING RADIUS	VACUUM	COIL LENGTH
mm	inch	mm	inch	kg/m	bar	psi	bar	psi	mm	bar	m
51	2	61	2 13/32	1.39	5	75	15	225	230	0.9	20
55	2 11/64	66	2 19/32	1.37	5	75	15	225	250	0.9	20
60	2 23/64	71	2 51/64	1.72	5	75	15	225	275	0.9	20
70	2 3/4	81	3 3/16	2.07	5	75	15	225	350	0.7	20
76	3	87	3 27/64	2.21	5	75	15	225	380	0.7	20
80	3 5/32	91	3 37/64	2.35	5	75	15	225	400	0.7	20
102	4	114	4 31/64	3.47	5	75	15	225	510	0.7	20

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.

BRANDING