


# CALORFIGHTER SW 300

FIREWATER DELUGE HOSE-ABS APPROVED

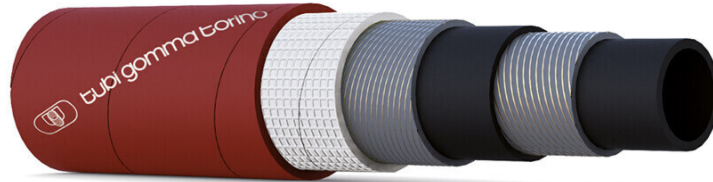

## APPLICATION

Delivery hose for firewater deluge hose application on oil rigs

## TUBE

Black, smooth, CR rubber

## REINFORCEMENT

High strength steel cord

## COVER

Glassfiber layers, co-vulcanized with an external layer of red CR rubber compound, fire, sea water, abrasion and ozone resistant

## WORKING TEMPERATURE

-40°F +212°F

-40°C +100°C

## SPECIFICATIONS

EN 15540:1999 (800°C X 30') / PDA ABS Nr. 16-GE1577500-PDA

ID		OD		WEIGHT	WP		BP		BENDING RADIUS	COIL LENGTH
mm	inch	mm	inch	kg/m	bar	psi	bar	psi	mm	m
51	2	80	3 5/32	4.90	20	300	100	1500	420	60
76	3	108	4 15/64	7.50	20	300	100	1500	535	60
102	4	134	5 9/32	11.00	20	300	100	1500	640	60
127	5	160	6 19/64	13.40	20	300	100	1500	1100	60
152	6	185	7 9/32	15.70	20	300	100	1500	1210	60

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.

## BRANDING

