


ECOGAS

SUCTION HOSE EXHAUST GASSES- HELIX GROOVED, CRUSH RESISTANT

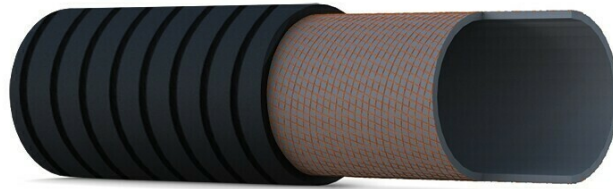

APPLICATION

Suction hose for vehicles exhaust gasses and other warm gasses. Heavy and crush resistant structure, used on the floors of the garages, coach works, test centers, etc

TUBE

Black, corrugated **EPDM** rubber compound

REINFORCEMENT

High strength synthetic plies

COVER

Black, corrugated, cloth impression **EPDM** rubber compound, heat, abrasion and weather resistant

WORKING TEMPERATURE

-40°F +338°F
-40°C +170°C

ID		WEIGHT	BENDING RADIUS	COIL LENGTH
mm	inch	kg/m	mm	m
51	2	1.00	300	ON DEMAND
76	3	1.55	450	ON DEMAND
102	4	2.20	600	ON DEMAND
127	5	2.70	750	ON DEMAND
152	6	3.10	900	ON DEMAND

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.