


# PETROBUNKER SW /20 - 4 tons

BUNKERING DELIVERY HOSE FOR PETROLEUM PRODUCTS

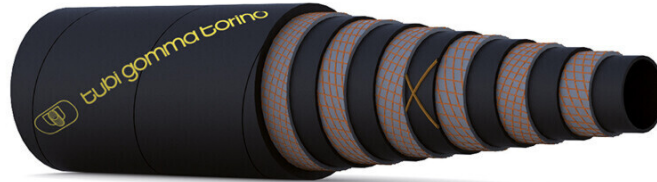

## APPLICATION

Delivery hose for bunkering and docks service for the transfer of crude oil and mixed fuels with aromatic contents up to 50%

## TUBE

Black, smooth, **NBR** rubber compound

## REINFORCEMENT

High strength synthetic cord, with 2 crossing copper wires for hose grounding

## COVER

Black, smooth cloth impression, **CR** rubber compound, resistant to oil, grease, sea water, ozone and flame retardant

## WORKING TEMPERATURE

-22°F +212°F

-30°C +100°C

ID		OD		WEIGHT	WP		BP		COIL LENGTH
mm	inch	mm	inch	kg/m	bar	psi	bar	psi	m
102	4	122	4 51/64	4.77	20	300	80	1200	60
127	5	153	6 5/32	7.40	20	300	80	1200	60
152	6	178	7	8.98	20	300	80	1200	60
203	8	227	8 15/16	10.70	20	300	60	900	40
254	10	285	11 7/32	16.93	20	300	60	900	20
302	12	337	13 17/64	22.34	20	300	60	900	12

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.

## BRANDING

