


SILSTAR SD /10 170°C

SUCTION AND DELIVERY FEP/SILICON HOSE FOR COSMETIC AND PHARMA INDUSTRY

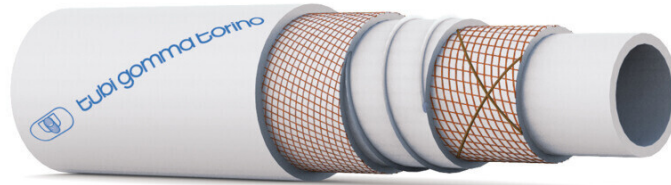

APPLICATION

Suction and delivery hose for pharmaceutical, cosmetic and food stuffs, very high temperature

TUBE

White, glossy, non conductive **FEP** (Fluorinate Ethylene Propylene)

REINFORCEMENT

High strength synthetic plies, with steel spirals and 2 crossing copper wires for hose grounding

COVER

White, smooth and glossy, cloth impression **SILICON VMQ** rubber, resistant to abrasion and weathering

WORKING TEMPERATURE

-76°F +338°F

-60°C +170°C

SPECIFICATIONS

FDA title 21 art.177.2600 (f) for fatty foods, BfR, ADI free, D.M. 21/03/73, CE1935/2004, PHTHALATE free Conformity to usp XXXVI nf31 ed.2013 and class VI and other normative references

ID		OD		WEIGHT	WP		BP		BENDING RADIUS	VACUUM	COIL LENGTH
mm	inch	mm	inch	kg/m	bar	psi	bar	psi	mm	bar	m
19	3/4	31	1 7/32	0.71	10	150	30	450	125	0.7	20
25	1	37	1 29/64	0.87	10	150	30	450	150	0.7	20
32	1 1/4	44	1 47/64	1.07	10	150	30	450	175	0.7	20
38	1 1/2	51	2	1.35	10	150	30	450	225	0.7	20
51	2	67	2 41/64	2.29	10	150	30	450	275	0.7	20
63.5	2 1/2	80	3 5/32	2.51	10	150	30	450	300	0.7	20
76	3	92	3 5/8	3.08	10	150	30	450	350	0.7	20

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.

BRANDING



CONFORMITÀ TO 1815/2003 (REACH) - CLASSI DI PERICOLO BASTANTE BASSI

SD

W.P. 10 BAR (150 PSI)

FDA

BfR

ADI free

PHTHALATE free



M

ITALY



tubi.gomma.torino