


# CALORSTEAM /AL FDA 170°C

TEXTILE REINFORCEMENT STEAM HOSE 7 BAR - FDA

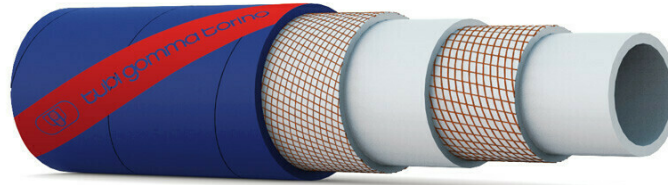

## APPLICATION

Delivery hose for potable hot water mixed with steam and detergents. Mainly used for washdown and sterilization in the food industry workshops

## TUBE

White, smooth, food quality EPM rubber compound

## REINFORCEMENT

High strength synthetic plies

## COVER

Blue, smooth, cloth impression EPDM rubber compound, abrasion, ozone and weather resistant

## WORKING TEMPERATURE

-40°F +338°F

-40°C +170°C

## SPECIFICATIONS

FDA title 21, art.177.2600 for aqueous foods

ID		OD		WEIGHT	WP		BP		COIL LENGTH
mm	inch	mm	inch	kg/m	bar	psi	bar	psi	m
10	13/32	20	25/32	0.28	7	105	70	1050	40
13	1/2	23	29/32	0.37	7	105	70	1050	40
15	19/32	25	1	0.41	7	105	70	1050	40
16	5/8	26	1 5/16	0.43	7	105	70	1050	40
19	3/4	31	1 7/32	0.58	7	105	70	1050	40
25	1	37	1 29/64	0.75	7	105	70	1050	40

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.

## BRANDING

